

HCI636K

STAMFORD


Winding 312 0.8 Power Factor

RATINGS

Class - Temp Rise		Cont. F - 105/40°C				Cont. H - 125/40°C				Standby - 150/40°C				Standby - 163/27°C			
50Hz	Star (V)	380	400	415	440	380	400	415	440	380	400	415	440	380	400	415	440
	Delta (V)	220	230	240	254	220	230	240	254	220	230	240	254	220	230	240	254
	kVA	525	525	525	525	570	570	570	570	593	593	593	593	610	610	610	610
	kW	420	420	420	420	456	456	456	456	474	474	474	474	488	488	488	488
	Efficiency (%)	94.9	95.0	95.1	95.1	94.8	94.9	95.0	95.1	94.7	94.9	95.0	95.1	94.7	94.8	94.9	95.1
	kW Input	443	442	442	442	481	481	480	479	501	500	499	499	515	515	514	513

60Hz	Star (V)	416	440	460	480	416	440	460	480	416	440	460	480	416	440	460	480
	Delta (V)	240	254	266	277	240	254	266	277	240	254	266	277	240	254	266	277
	kVA	625	656	656	656	675	713	713	713	702	742	742	742	722	763	763	763
	kW	500	525	525	525	540	570	570	570	562	594	594	594	578	610	610	610
	Efficiency (%)	94.9	95.0	95.1	95.2	94.8	94.9	95.0	95.1	94.7	94.8	95.0	95.1	94.7	94.8	94.9	95.1
	kW Input	527	552	552	551	570	601	600	600	593	626	625	624	610	644	643	642

DIMENSIONS

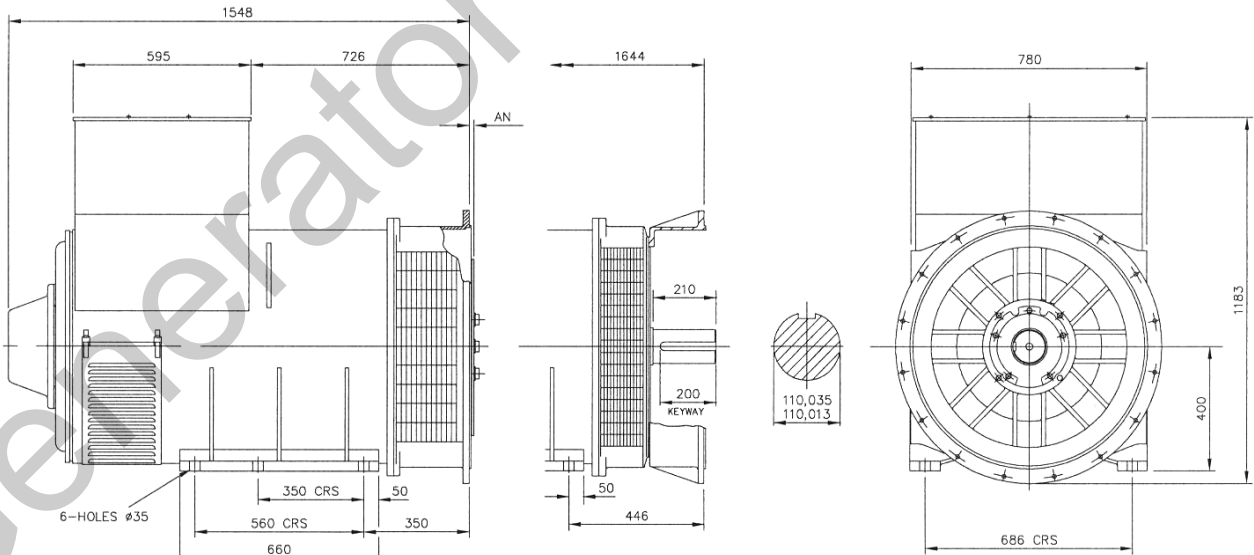

SAE	14	18	21	24
AN	25.4	15.87	0	0

Generator Solutions AS

APPROVED DOCUMENT

STAMFORD

Head Office Address:
Barnack Road, Stamford
Lincolnshire, PE9 2NB
United Kingdom
Tel: +44 (0) 1780 484000
Fax: +44 (0) 1780 484100

www.cumminsgeneratortechnologies.com

Copyright 2010, Cummins Generator Technologies Ltd, All Rights Reserved
Stamford and AvK are registered trade marks of Cummins Generator Technologies Ltd
Cummins and the Cummins logo are registered trade marks of Cummins Inc.